


Mounting enclosure (gas bottle compartment adjacent)

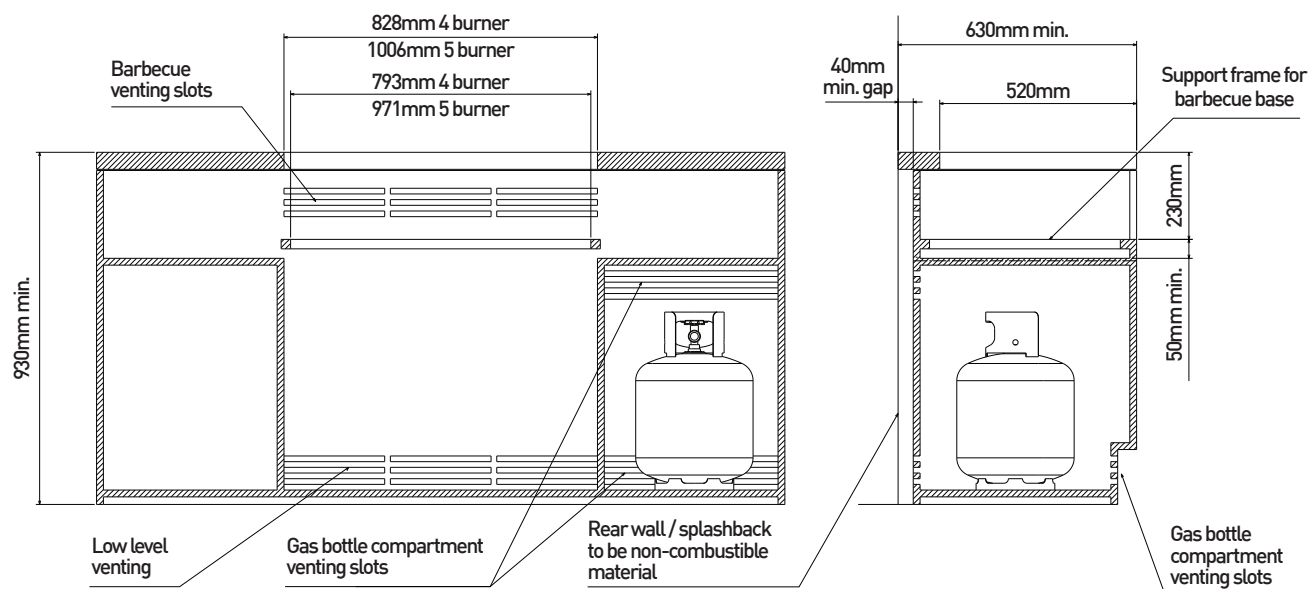

Enclosure construction

- All materials used for the construction of the enclosure and gas bottle compartment must be non-combustible.
- A 40mm min. gap between the enclosure and rear wall is required. This allows for venting of both the barbecue and gas bottle compartment. Vents should also be positioned at the front of the enclosure.
- The appliance can be supported by either hanging from the benchtop (hanging brackets supplied) or sitting the appliance on a support frame that is built in to the enclosure.

Enclosure ventilation requirements

EN 498:2012 & EN484:2017 ventilation requirements for 9kg cylinder storage are:

- Where of sheet metal or similar impervious construction there shall be ventilation openings at the top and bottom of the enclosure or recess, each opening providing a free area of at least 200cm² for every cylinder enclosed.
- For LPG installations having enclosed cabinetry below the separation panel that does not contain a gas bottle, low level venting must be installed. This is to allow the gas which is heavier than air to escape from the enclosure in the situation where there may be a leak. A minimum opening of 200cm² is required.

Mounting enclosure (gas bottle compartment underneath)

