NEW

TWIST

The ergonomic centre-pole parasol





TWIST





Frame 6 or 8 parts

Pole Ø 45 mm Premium design

Function: All the operating functions at waist level: open/close using a crank, tilt to 32° using a rotary handle, for 360° rotation using a clamping lever

Canopy self-tensing through flexible rib ends Frame roof: round, square, rectangular

Fabric corners reinforced with leather (Fabric quality 5, 4)

Frame colour Matt white or anthracite powder-coated aluminium

Canopy Fabric quality 5: polyacrylic, 300 g/m², UV protection > 98 %

 $\label{eq:polyester} Fabric \ quality \ 4: \ polyester, 250 \ g/m^2, \ UV \ protection > 98 \%$ $\ Fabric \ quality \ 2: \ polyester, 220 \ g/m^2, \ UV \ protection > 98 \%,$

(Only available on the previous model)

Flounce Only available without

Protective cover

Can be ordered as an optional extra

Accessories

Lower pole with height adjustment

Electrical accessories Osyrion Spot LED with integrated battery pack

















Assortment

	Nominal size without flounce	Number of ribs	Order no. Frame matt white	Order no. Frame anthracite
	cm			
\bigcirc	Ø 270	8 parts	207 00 270 161	207 00 270 301
\bigcirc	Ø 300	8 parts	207 00 300 161	207 00 300 301
	Ø 330	8 parts	207 00 330 161	207 00 330 301
	240×240	8 parts	207 00 241 161	207 00 241 301
	210×150	6 parts	207 00 212 161	207 00 212 301
	250×200	6 parts	207 00 252 161	207 00 252 301

Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Crank height	Clear headroom / inclined	Total height / inclined	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m²	cm	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	М	В	E	D	F/K	G/L	С		_
Ø 270	250	4.5	5.2	100	90	205/130	235/275	50×50	40	55 (7)
Ø 300	275	4.5	6.4	90	90	205/120	240/280	60×60	40	50 (7)
Ø 330	305	4.5	7.7	75	90	205/115	240/290	60×60	55	45 (6)
240×240	-	4.5	5.8	70	90	205/135	240/265	50×50	40	45 (6)
210×150	-	4.5	3.2	105	90	205/160	230/245	50×50	30	55 (7)
250×200	-	4.5	5.0	80	90	205/150	240/255	50×50	40	45 (6)


The listed measures represent extrapolated average values that may be slightly different on the product (\pm 2 % \pm 5 cm).


Traditionally, the nominal dimension is calculated by doubling the rib length. For this reason, the nominal dimension can exceed the specified tolerance range.


Height dimensions are based on ground socket BT. These vary slightly depending on the type of base. Except for steel base minus 5 cm.


The max. wind speed limits as per our separate sheet apply only if the parasol canopy is in a horizontal position and if there is a fix ground anchorage.

 $In the presence of several parasols, the \ minimum \ distance \ between \ one \ parasol \ and \ another \ and \ between \ parasols \ and \ walls \ shall \ be \ 20 \ cm.$










Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), Guarantee water drainage





8





6

7

5


9

10

	Accessories	Absolutely necessary	Order no.
	Protective cover made of coated, tear-resistant polyester fabric		
1	Protective cover with zip and rod		350 01 609 980
	10 pieces, protective cover with zip and rod		350 01 609 974
	Electrical accessories		
_			350 01 563 000
2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100
	Fixations		
	Ground sockets		<u> </u>
4	Ground socket BT, galvanised steel	Connection tube BT	350 01 206 100
	w		
5	Wall consoles Wall bracket Z, 180 mm, galvanised steel	Support tube Z	350 01 205 000
	Train brach (2), 200 thirt, gairvainoca steel		
	Bases		
6	Concrete base Z, 30 kg, Ø 47×8.5 cm	Support tube Z	350 01 109 532
6	Concrete base Z, 40 kg, Ø 60×8.5 cm	Support tube Z	350 01 109 529
	1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60×8.5 cm	Support tube Z	350 01 109 533
6	Concrete base Z, 55 kg, Ø 60×11 cm	Support tube Z	350 01 109 528
	1 pallet (20 pieces) concrete base Z, 55 kg, Ø 60×11 cm	Support tube Z	350 01 109 534
7	Steel base Z 40 kg, 58.5×58.5×2 cm, galvanised steel	Support tube Z	350 01 100 210
	Add-on weight 30 kg, 57.5×57.5×1.7 cm, galvanised steel		350 01 100 310
_	Bases with castors		
8	³ Natural granite base Z, 40 kg, 45 × 45 × 8 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 465
8	³ Natural granite base Z, 55 kg, 55×55×9 cm, natural stone,	Support tube Z	350 01 109 445
	with castors and retractable handle		
9	³ Base with castors Z, 55 kg, 65×65×11 cm, light concrete	Support tube Z+	350 01 110 000
	(without decorative plate) NEW	Decorative plate	
	Decorative plate in grey for base with castors Z, 55 kg, plastic NEW		350 01 110 110
	Decorative plate in anthracite for base with castors Z, 55 kg, plastic NEW		350 01 110 120
	Decorative plate in sand for base with castors Z, 55 kg, plastic NEW		350 01 110 130
10	^{1,3} Base with castors Z, 55 kg, 65×65×11 cm, cast concrete decor	Support tube Z	350 01 102 900
	^{1,3} 1 pallet (5 pieces) base with castors Z, 55 kg, Ø 65×65×11 cm, cast concrete decor	Support tube Z	350 01 102 950
	Support tubes/Connection tubes		250.01.001.010
_	Support tube Z, internal, Ø 40/37 mm, galvanised steel NEW		350 01 201 610
12	Connection tube BT, internal, Ø 40 / 37 mm, galvanised steel, incl. cover matt white NEW		350 01 201 816
	Connection tube BT, internal, Ø 40/37 mm, galvanised steel, incl. cover anthracite NEW		350 01 201 830
	Lower pole		<u> </u>
	Lower pole with height adjustment to 25 cm, matt white NEW		350 01 902 716
	Lower pole with height adjustment to 25 cm, anthracite NEW		350 01 902 730
	Various fivation types		
12	Various fixation types Lawn spike Z, 85×150×350 mm, galvanised steel	Support tube Z	350 01 205 400
13	Lavert spilite 2, 00 ^ 100 ^ 000 THITI, yarvariised steel	Support tube Z	330 01 203 400

¹ while stocks last

³ only suitable for smooth, joint free surface coverings

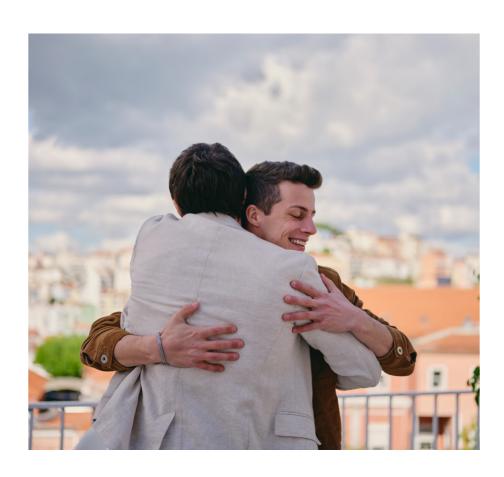



Glatz AG Parasols 2023 Season

